




QVP22BEA



Product Features

- ▲ Starlight
- ▲ 2MP (1920 × 1080) H.265 full real time coding
- ▲ Max. resolution: 1920 × 1080
- ▲ ICR auto switch, true day / night
- ▲ 30 ~ 50m IR night view distance
- ▲ 3D DNR, true WDR, HLC, BLC, Defog, Smart IR and ROI coding
- ▲ 1CH audio input
- ▲ Hardware reset
- ▲ Built-in micro SD card slot, up to 128GB
- ▲ DC12V/PoE power supply
- ▲ Intelligent analytics
- ▲ IP67 ingress protection
- ▲ Support three streams
- ▲ P2P function optional
- ▲ Support remote monitoring by smart phones & tablet PCs with iOS and Android OS

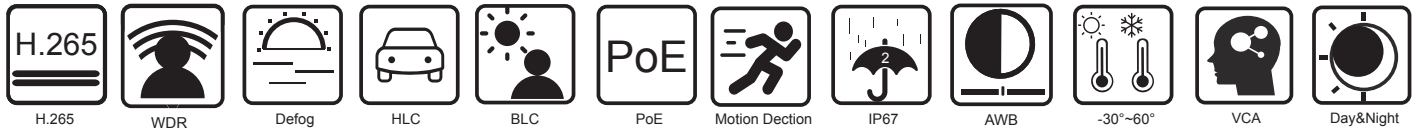

SPECIFICATION

Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	DC Iris (motorized lens)
Min. Illumination	0.005 lux@F1.6,AGC ON; 0 lux with IR 0.0028 lux@F1.2,AGC ON; 0 lux with IR
Lens	2.8~12mm@F1.4, horizontal field of view:103°~32°
Lens Amount	M12 or Φ14 optional
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°
Interfaces	
Network	RJ45
Audio	1CH audio input
Storage	Built-in micro SD card slot; up to 128GB
Hardware Reset	Yes
Video Output	No

Image	
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz : 1080P / 720P(1 ~ 30fps); 50Hz : 1080P / 720P(1 ~ 25fps)
Sub Stream	60Hz : 720P/D1/CIF (1~30fps); 50HZ: 720P/D1/CIF (1~25fps)
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/CIF/480x240 (1~25fps)
Bit Rate	64 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Audio Compression	G711A / U
Functions	
Remote Monitoring	Web browsing, CMS remote control
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
PoE	Yes , IEEE802.3af
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Smart Alarm	Motion detection, SD card error, SD card full
General function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
IR Distance	30 ~ 50 m
Ingress Protection	IP 67
Intelligent Analytics	Object abandoned/missing detection, region entrance/exiting/intrusion detection(human/vehicle classification), line crossing detection(human/vehicle classification), video tampering detection, scene change detection, face detection, face capture, crowd density detection, heat map, human/vehicle counting, human tracking
Others	
Power Supply	DC12V / PoE
Power Consumption	< 9.5W
Dimensions (mm)	217.7 × 80.5 × 80.5
Operating Environment	-30 °C ~ 60°C(-22°F~140°F) Humidity: less than 95 %(non-condensing)
Weight (net)	Approx. 0.67KG
Installation	Ceiling mounting; Wall mounting

Dimensions

